



Instructions

1. Print this job duplexed on 11x17 paper.
2. Use heavier paper as it is less likely to stretch or shrink for calibration.



Instructions continued on other side.




Side 2

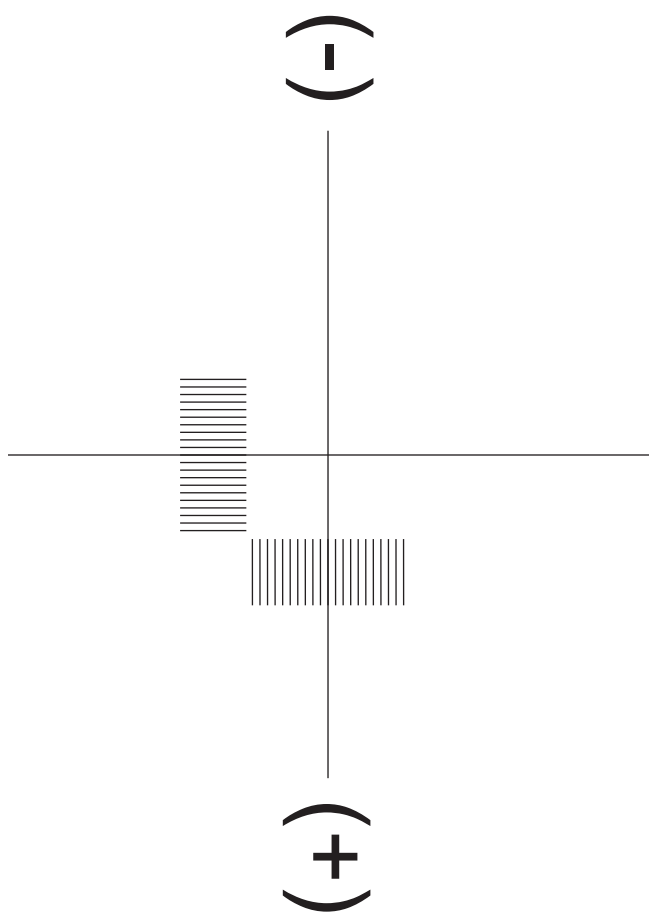

Lead Edge







Instructions

1. Check the cross hairs in the centre of the page for alignment.
2. To adjust the alignment, enter the Tools mode on the 2045/2060 using the Access button. The default password is 11111.
3. Select Tools pathway, Select Tab 2, Select Registration.
4. To check for registration measure from the edge of the paper to the cross hairs in the middle. The 2045/60 registers from the middle of the page.
5. Keep adjusting each tray until you are satisfied with the results.

Side 1

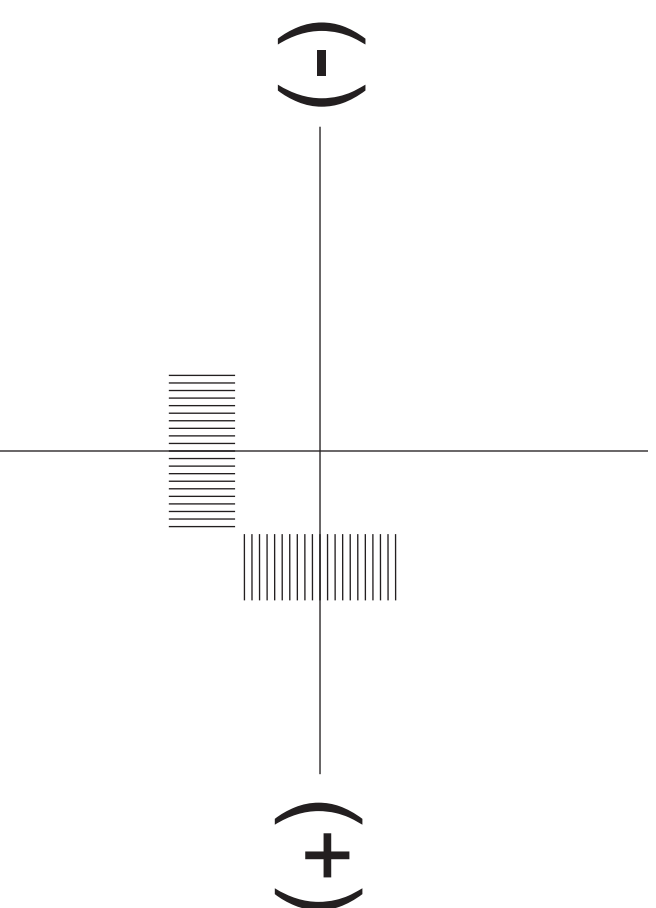

Lead Edge

